


Neutral and earthing terminals - IP20

Strongly positioned and highly flexible. FTG offers a strong portfolio of neutral conductors and earthing terminals, especially for finger safe systems.

- Mounting on DIN-rail
- Finger safe system
- Apertures for conductors closed on one side
- Maximum operating current 63 A

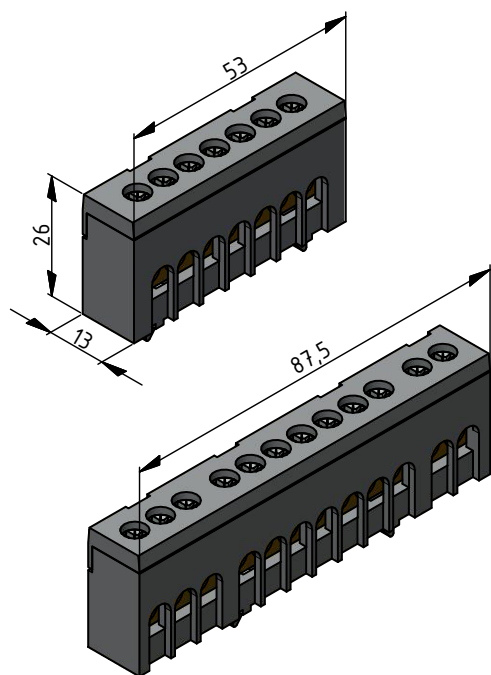

Technical Details


Maximum operating current	63 A
Protection class	IP20

Connecting dimensions 7-15 x \varnothing 5,3 mm

Single and multi stranded	1,5 – 16 mm ²
Fine stranded with ferrule	1,5 – 10 mm ²

Materials

Clamping body	brass bright
Cylinder screw with combi-cross-slot	steel galvanized
Housing	■ green ■ blue

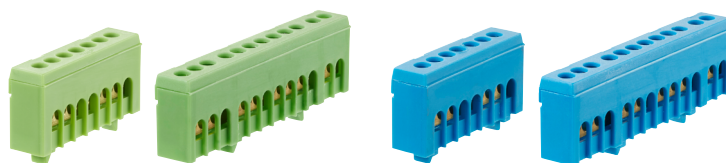

870X-XXFS

Part number	Description
870S-7FS 129268 ■	Earthing terminal 7 connectors, green, finger safe, 7x16mm ²
870S-12FS 132877 ■	Earthing terminal 12 connectors, green, finger safe, 12x16mm ²
870N-7FS 127803 ■	Neutral conductor 7 connectors, blue, finger safe, 7x16mm ²
870N-12FS 132876 ■	Neutral conductor 12 connectors, blue, finger safe, 12x16mm ²