

Socket model ES 12

ES12CNER - Pack. 10/220 pcs

Relay socket type ES 12, for undecal relays (11 pins) with 3 PDT and double A2 contact, screw connections, connection facility for input interference suppression modules, for mounting on NS 35/7,5.

Rated current / Rated voltage 12 A / 300 VAC (CSA)
10 A / 300 VAC (UL)


Dielectric strength adjacent contact circuits 2500V
Dielectric strength coil contact circuits 2500V

Connection data


Conductor cross section solid and stranded min. 0,5 mm²
Conductor cross section solid and stranded max. 2,5 mm²
Conductor cross section AWG min. 20
Conductor cross section AWG max 14
Stripping length 7 mm
Screw thread M3

General data

Width 38 mm
Height 75 mm
Color Black
Ambient temperature (operation) -25 °C ... 85 °C

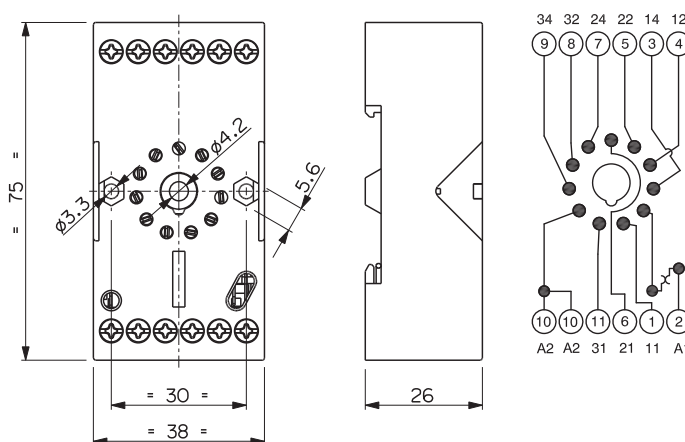

Accessories



Model MH 60

MH60 - Pack. 10/200 pcs

Spring for relay securing

Material: X Cr Ni Steel

Relay height: 58-60 mm

Model MH 55

MH55 - Pack. 10/200 pcs

Spring for relay securing

Material: X Cr Ni Steel

Relay height: 53-55 mm

standard article