

Socket model **ES 62/AS**

ES62ASCNER - Pack. 10/270 pcs

Relay socket model ES 62/AS for miniature relay with protection and indication circuit, screw connections.



Input voltage	12 VAC/VDC - 24 VAC/VDC
Coil voltage	12 VDC - 24 VDC
Rated current	6 A
Dielectric strength adjacent contact circuits	2500V
Dielectric strength coil contact circuits	2500V

Connection data

Conductor cross section solid and stranded	max. 2,5 mm ² (AWG 14)
Stripping length	9 mm
Screw thread	M 2,5

General data

Width	6,2 mm
Height	101 mm
Color	Black
Ambient temperature (operation)	-25 °C ... 85 °C

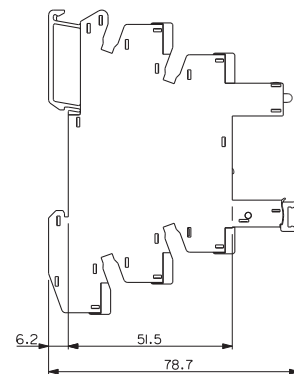

Accessories



Model PL 64
PL64 - Pack. 2/96 pcs
Print label for ES 62 series



Model BB 20
BB20 - Pack. 10/300 pcs
Bus bar 20 poles for ES 62 series



Model BTF 2
BTF2 - Pack. 10/1000 pcs
Butterfly isolator for ES 62 series

Standard article